

509, 625  
20 SEP 2004(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number  
**WO 03/083306 A1**(51) International Patent Classification<sup>7</sup>: F04C 2/10,  
2/08, 13/00, F01C 21/02

(21) International Application Number: PCT/IB03/01233

(22) International Filing Date: 28 March 2003 (28.03.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:  
BO2002A000167 29 March 2002 (29.03.2002) IT(71) Applicant (for all designated States except US): CPS  
COLOR EQUIPMENT S.P.A. [IT/IT]; Via Dell' Agri-  
cultura, 103, I-41038 S. Felice sul Panaro (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MANFREDINI,  
Giorgio [IT/IT]; Via della Libertà, 28, I-41032 Cavezzo  
(IT). BORTOLI, Uber [IT/IT]; Via F.lli Cairoli, 31,  
I-41037 Mirandola (IT).(74) Agents: PROVVISIONATO, Paolo et al.; Provvision-  
ato & Co. S.r.l., Piazza di Porta Mascarella, 7, I-40126  
Bologna (IT).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,  
UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

## Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTERNAL GEAR PUMP WITH RECESSES ON THE GEAR BEARING SURFACES

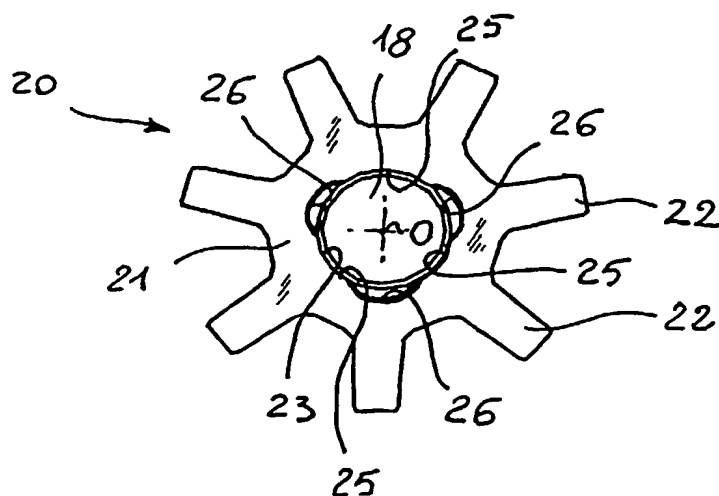

(57) Abstract: A positive-displacement pump, in particular for use in machines for dispensing fluids, comprises two elements that are rotatable with respect to one another and which mesh with one another (20, 30), each of them being rotatably mounted in the pump with centered coupling without interference with a corresponding centering body (18, 11a). At least one of the two above-mentioned rotatable elements has a plurality of undercut regions (26, 34, 35) at the location of the centering walls. The undercut regions (26, 34, 35) comprise a wall portion which is spaced with respect to the facing wall of the respective centering body.

WO 03/083306 A1

## INTERNAL GEAR PUMP WITH RECESSES ON THE GEAR BEARING SURFACES

The present invention relates to improvements to a rotary positive-displacement pump for fluid products.

The invention has been developed with particular but not exclusive regard to a pump for use in machines for dispensing colouring agents for the production of paints, varnishes, inks and the like.

Positive-displacement pumps of the rotary type having internal gears are known. One of these pumps is illustrated in Figure 1 appended to the present description and is the subject of patent IT-1292625 belonging to the same applicant, the content of which is regarded as incorporated by reference in the present description. The known pump illustrated comprises a rotor 13 mounted on the end of a main shaft 12. The rotor 13 has peripheral teeth 15 that can mesh with teeth 16 of an idle sprocket 17 which is supported in rotation by a pin 18 of a conveying body 19.

Despite the generally satisfactory operation of the above-mentioned known positive-displacement pump, in a few particular cases some malfunctions have been encountered which have led to the jamming of the idle sprocket 17 on the pin 18 and of the rotor 13 inside the cylindrical cavity 11a of the body 11 of the pump (illustrated diagrammatically in Figure 1). In particular, the above-mentioned malfunctions have occurred when the positive-displacement pump has been used with some types of colouring product that, owing to the particular chemical composition, promote the creation of a sticky film. It has been found that this sticky film can penetrate and become wedged between the idle sprocket 17 and its support pin 18, and also between the outer curved

surface of the rotor 13 and the associated cylindrical housing 11a in the body 11 of the pump, until it causes the complete jamming of the rotating elements.

In order to overcome the disadvantages indicated above and at the same time to provide a reliable pump, but without having any substantial effect on the production and running costs, the present invention relates to a positive-displacement pump having the characteristics indicated in the claims which follow.

Further features and advantages will emerge from the following detailed description of a preferred embodiment, with reference to the appended drawings which are given purely by way of non-limiting example and in which:

- Figure 1 shows a pump arrangement of the prior art, as discussed above,
- Figure 2 is a front view of an idle sprocket of a pump according to the present invention, which sprocket is mounted on the associated support pin, and
- Figures 3 and 4 are perspective representations, on an enlarged scale, of two alternative embodiments of a rotor of a pump according to the present invention.

Referring now to Figure 2, an idle sprocket 20, which is to be mounted in rotary positive-displacement pumps of a generally known type illustrated by way of example in Figure 1, comprises a body 21 from which a plurality of teeth 22 extend radially. The idle sprocket 20 has a central opening 23 in which, in use, the pin 18 of the conveying body 19 is accommodated. In the embodiment illustrated in Figure 2, the central opening 23 has a series of centring portions 25 which are in the shape of an arc of a circle with a centre O, coinciding with the centre of the pin 18. Interposed

between the curved centring portions 25 are undercut portions 26 at the location of which the internal wall of the central opening 23 of the idle sprocket 20 is spaced from the peripheral cylindrical portion of the pin 18. In the embodiment illustrated in the drawing, the central opening 23 comprises three centring portions 25 alternating with as many undercut portions 26, but the number and location of the above-mentioned portions of the central opening 23 can of course vary in accordance with the specific requirements of use of the positive-displacement pump and the particular fluid to be treated.

Figure 3 illustrates an embodiment of a rotor 30 for a positive-displacement pump according to the present invention. In more detail, the rotor 30 has a cylindrical peripheral curved surface 31 which has first peripheral notches 32 defining a plurality of peripheral teeth 33 which can mesh with the teeth 22 of the idle sprocket 20. The outer face of each peripheral tooth 33 has, between two adjacent peripheral notches 32, depressions 34 which help to reduce the surface area of the peripheral curved surface 31 of the rotor 30 which, in use, is coupled without interference in the corresponding cylindrical cavity 11a provided in the body 11 of the positive-displacement pump. Other depressions 36 are provided for the same reason on the peripheral curved surface 31, in a position aligned longitudinally with the peripheral notches 32.

Figure 4 illustrates a variant of the rotor 30 in which, in addition to the depressions 34 formed on the outer face of each peripheral tooth 33, an annular depression or chamfer 35 may be provided on a portion of the peripheral curved surface 31 remote from the peripheral teeth 33, again for the purpose of reducing the surface area of the peripheral curved surface 31 coupled in rotation without interference

to the corresponding cavity 11a provided in the body 11 of the positive-displacement pump.

During the operation of the pump according to the present invention, the rotor 30 is operated in rotation by the shaft 12 and rotates accommodated inside the corresponding cylindrical cavity 11a, provided in the body 11 of the pump, on which the peripheral curved surface 31 is centred. The size of the cylindrical regions of the peripheral curved surface 31 that are not affected by the depressions 34, 36 and/or by the chamfer 35 is sufficient to maintain a good centring of the rotor inside the pump body. The depressions 34 appear also to help to break any film which might form inside the fluid product, in particular the colouring product in use.

The peripheral teeth 33 of the rotor 30 mesh, as is known, with the teeth 22 of the idle sprocket 20, driving the latter in rotation about the pin 18. In this case too, the curved centring portions 25 of the central opening 23 are sufficient to maintain the correct centring of the idle sprocket 20 on the pin 18, while the curved undercut portions 26, in addition to reducing the surface area of the idle sprocket 20 in contact with the pin 18, appear to help to break or prevent the formation of a film inside the fluid product in use.

Naturally, the principle of the invention remaining the same, the forms of embodiment and the details of construction may be varied widely with respect to those described and illustrated, without thereby departing from the scope of the present invention.

CLAIMS

1. A positive-displacement pump, in particular for use in machines for dispensing fluids, comprising two elements that are rotatable with respect to one another and which mesh with one another (20, 30), each rotatable element being rotatably mounted in the pump with centred coupling without interference with a corresponding centring body (18, 11a), characterised in that at least one of the two rotatable elements has a plurality of undercut regions (26, 34, 35, 36) at the location of the centring walls, the undercut regions (26, 34, 35, 36) comprising a wall portion which is spaced with respect to the facing wall of the respective centring body.
2. A positive-displacement pump according to claim 1, characterised in that it comprises at least one gear or sprocket (20) mounted rotatably on a pin (18), the central opening of the sprocket (20) comprising portions of centring wall (23) which define the centred coupling of the sprocket 20 to the pin (18) and which alternate with portions of undercut wall (26) spaced from the pin (18).
3. A positive-displacement pump according to claim 2, characterised in that it comprises three portions of centring wall (23).
4. A positive-displacement pump according to claim 1, characterised in that it comprises at least one gear or rotor (30) mounted rotatably inside a cylindrical cavity (11a) and having a peripheral curved surface (31) for defining the centred coupling of the rotor (30) to the cylindrical cavity (11a), portions of undercut wall or depressions (34, 35, 36) spaced from the cylindrical cavity (11a) being provided on the peripheral curved surface (31).

5. A positive-displacement pump according to claim 4, characterised in that peripheral notches (32) are provided on the cylindrical peripheral curved surface (31) of the rotor (30) and define a plurality of peripheral teeth (33), at least some depressions (34) being provided on the outer face of each peripheral tooth (33), between two adjacent peripheral notches (32).

6. A positive-displacement pump according to claim 5, characterised in that at least second depressions (36) are provided on the cylindrical peripheral curved surface (31) of the rotor, in a position aligned longitudinally with the peripheral notches (32).

7. A positive-displacement pump according to claim 5, characterised in that it comprises an annular depression or chamfer (35) on a portion of the peripheral curved surface (31) remote from the peripheral teeth (33).

1/1

FIG.1

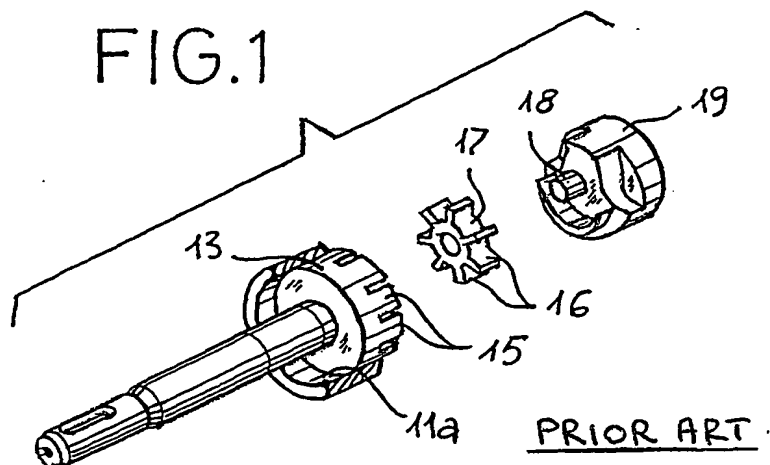


FIG.2

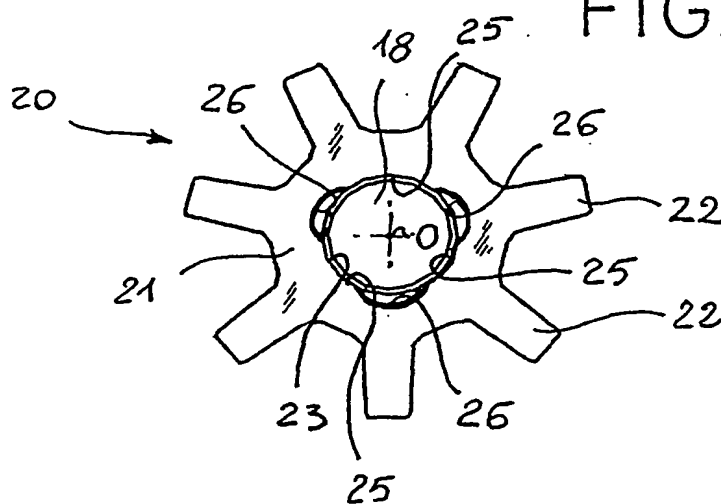


FIG.3


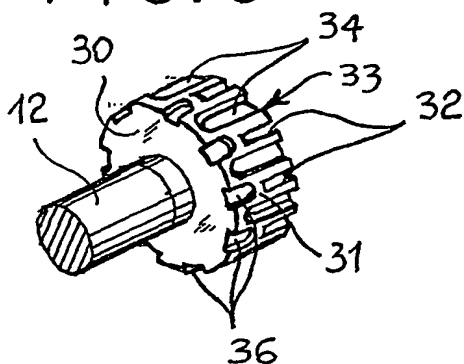


FIG.4



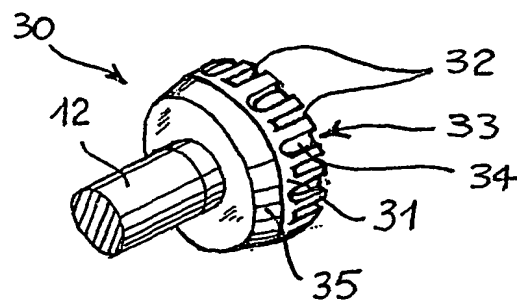

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/01233

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F04C2/10 F04C2/08 F04C13/00 F01C21/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04C F01C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 562 959 A (HYDRO FLUID) 18 October 1985 (1985-10-18)	1,4
Y	figures 1,2,6 page 3, line 12 - line 34 ----	2,3
X	EP 0 555 173 A (THRIGE PUMPER AS) 11 August 1993 (1993-08-11) figures 1,3,4 column 2, line 37 - line 40 ----	1,4
X	US 3 331 258 A (OTTO ECKERLE ET AL) 18 July 1967 (1967-07-18) figures 7,8 column 4, line 5 - line 13 ----- -/--	1,4

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

17 June 2003

Date of mailing of the international search report

25/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lequeux, F

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/01233

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 062 836 A (JUELICHER WILHELM ET AL) 16 May 2000 (2000-05-16) figure 1 column 1, line 4 - line 7 column 1, line 28 - line 32 column 1, line 64 - column 2, line 3 ---	2,3
A	DE 18 02 561 U (ROBERT BOSCH GMBH ) 17 December 1959 (1959-12-17) figure 2 page 2, line 34 - line 36 ---	2,3
A	EP 0 696 679 A (ABB PATENT GMBH) 14 February 1996 (1996-02-14) figures 1,2 column 1, line 22 - line 28 column 4, line 41 - line 45 ---	2,3
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 14, 22 December 1999 (1999-12-22) -& JP 11 247766 A (MIKUNI ADEC CORP), 14 September 1999 (1999-09-14) abstract figures 2,4 -----	4

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 03/01233

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2562959	A	18-10-1985	FR 2562959 A1	18-10-1985
EP 0555173	A	11-08-1993	DK 12592 A	04-08-1993
			AT 137308 T	15-05-1996
			AU 662590 B2	07-09-1995
			AU 3281093 A	05-08-1993
			CA 2088611 A1	04-08-1993
			DE 69302291 D1	30-05-1996
			DE 69302291 T2	21-11-1996
			EP 0555173 A1	11-08-1993
			ES 2089769 T3	01-10-1996
			JP 3359366 B2	24-12-2002
			JP 7224766 A	22-08-1995
			US 5322421 A	21-06-1994
US 3331258	A	18-07-1967	CH 456354 A	15-07-1968
US 6062836	A	16-05-2000	DE 19701276 A1	23-07-1998
			JP 10205460 A	04-08-1998
DE 1802561	U		NONE	
EP 0696679	A	14-02-1996	DE 4425226 A1	18-01-1996
			DE 59506206 D1	22-07-1999
			EP 0696679 A1	14-02-1996
			ES 2134379 T3	01-10-1999
JP 11247766	A	14-09-1999	NONE	